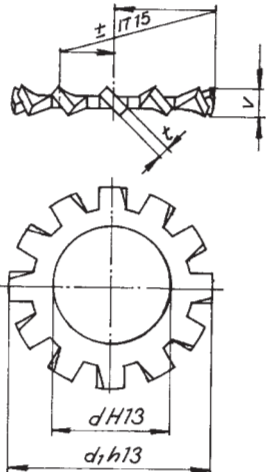


Ozubené podložky - OP STN 021744 b		d	d ₁	t	v	Priemer skrutky	Katalógové číslo
 <p>Materiál: Pásová oceľ 11 701.20</p>		1,8	3,8	0,25	0,6	1,7	OP 018x038x025x060
		2,2	4,5	0,30		2,0	OP 022x045x030x060
		2,8	5,5			2,6	OP 028x055x030x060
		3,2	6,0	0,35	0,7	3,0	OP 032x060x030x070
		3,7	7,0		0,8	3,5	OP 037x070x035x080
		4,3	8,0		1,0	4,0	OP 043x080x035x100
		5,3	9,0	0,60	1,3	5,0	OP 053x090x060x130
		6,4	11,0	0,70	1,5	6,0	OP 064x110x070x150
		8,4	14,0	0,80	1,9	8,0	OP 084x140x080x190
Tolerancie t		10,5	17,0	1,00	2,0	10,0	OP 105x170x100x200
0,25	±0,025	12,5	22,0	1,20	2,6	12,0	OP 125x220x120x260
0,30	±0,035	15,0		1,50	3,2	14,0	OP 150x220x150x320
0,35		17,0	27,0		3,8	16,0	OP 170x270x150x380
0,60	±0,045	19,0	32,0	1,80		18,0	OP 190x320x180x380
0,70		20,0			4,0	20,0	OP 200x320x180x400
0,80		Tolerancie: podľa STN 021070; trieda presnosti A					
1,00	±0,055	Povrchová úprava podľa želania: <ul style="list-style-type: none"> - bez povrchovej úpravy - čiernenie - fosfátovanie - zinkovanie - modrý chromát - zinkovanie - žltý chromát 					
1,20							
1,50	±0,065						
1,80	±0,085						
		Objednávanie: Ozubená podložka OP 200x320x180x400 (katalógové číslo), povrchová úprava, počet kusov					